


Part Number: AE-RJD102A011H

1*1 Port RJ45 10/100Base-T Network Connector

Page: 1/3

- RoHS compliant.
- Housing: PA66 Black UL94V-0.
- Shielding: Thickness With Brass.
- Contact: Phosphor bronze. With 30μ" gold plating.
- Operating Temperature: -40°C TO +85°C.

Mechanicals:

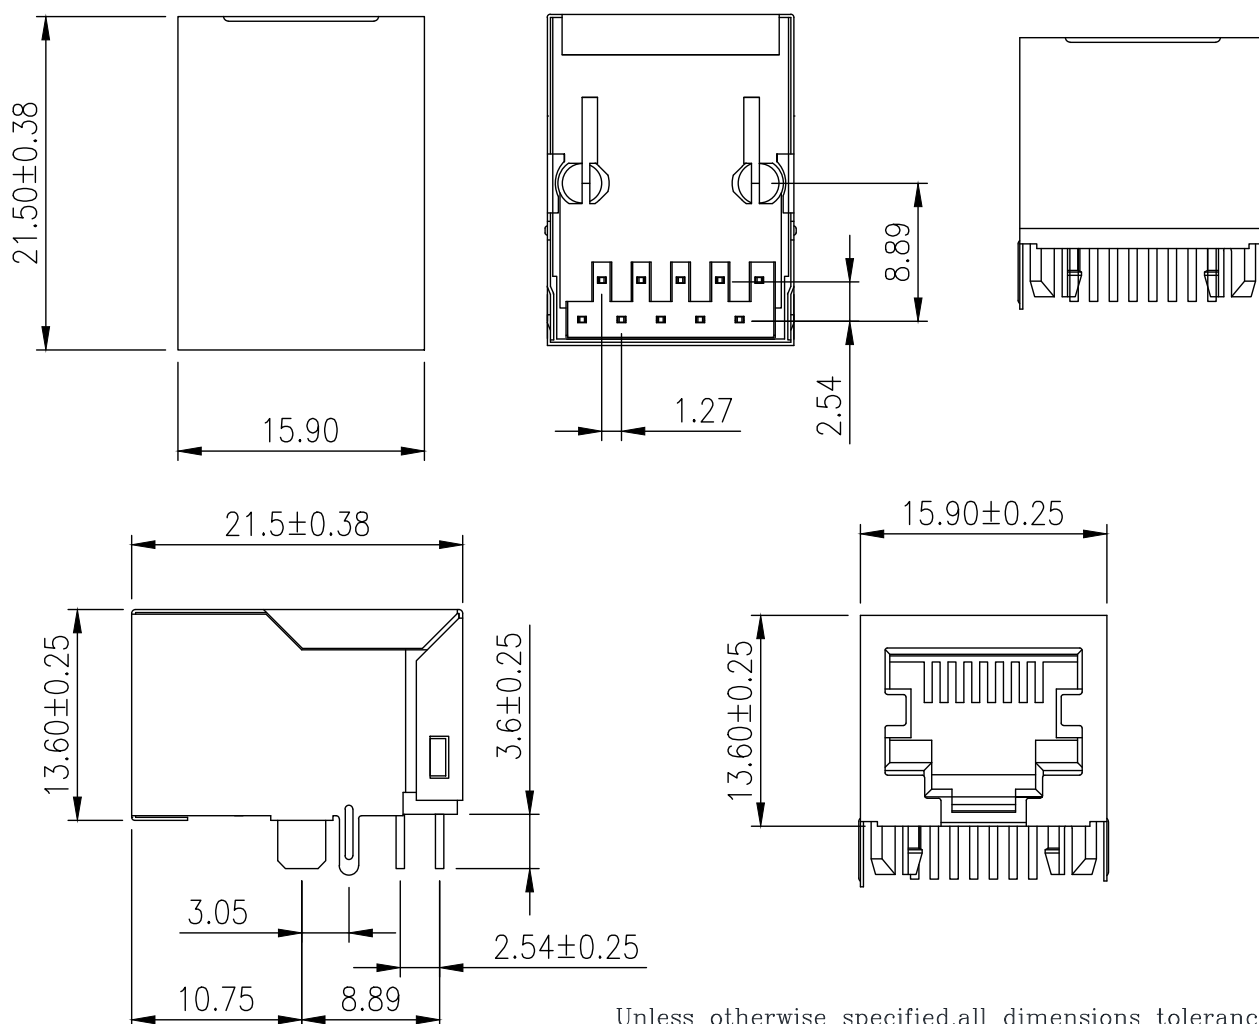


Unless otherwise specified, all dimensions tolerances is $\pm 0.254 / 0.010$.


Part Number: AE-RJD102A011H

1*1 Port RJ45 10/100Base-T Network Connector

Page: 2/3

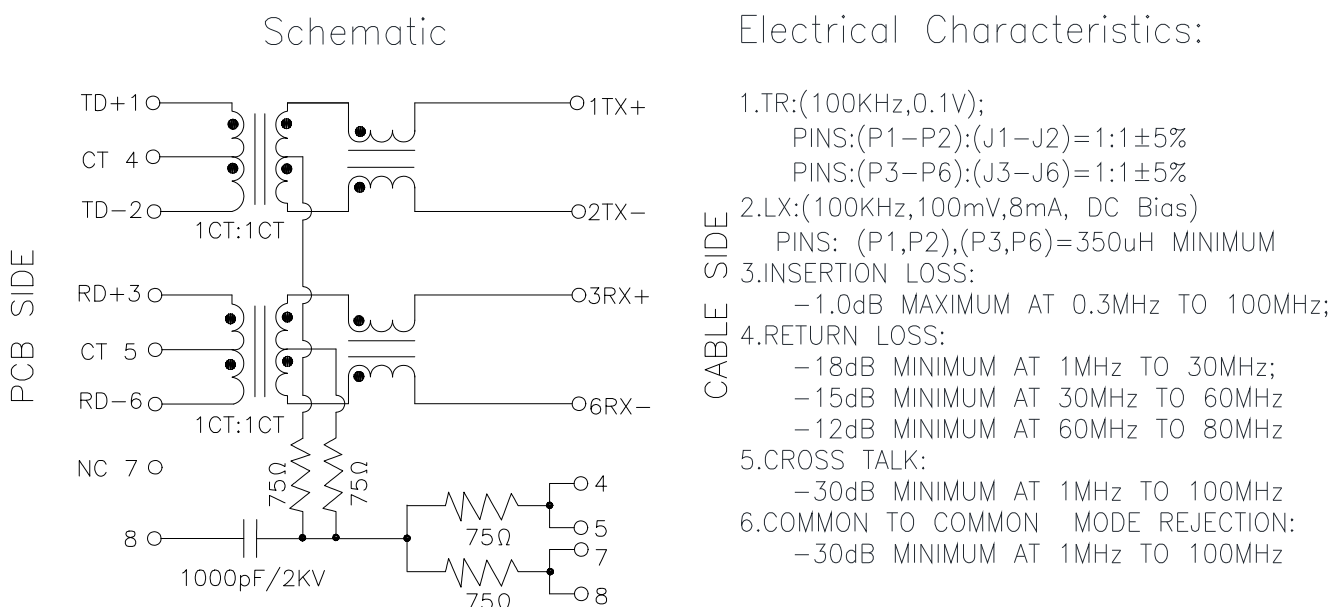

Recommended PCB Layout:

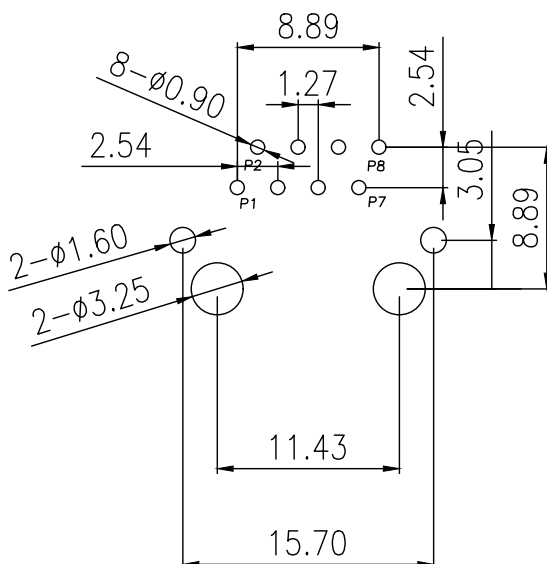

RECOMMENDED P.C.B LAYOUT(PCB THICKNESS: 1.6mm)
COMPONENT SIDE VIEW(TOLERANCE: ±0.05mm)

Part Number: AE-RJD102A011H

1*1 Port RJ45 10/100Base-T Network Connector

Page: 3/3

Reliability Test And Condition:

Test Item	Test Condition	Cycles or Hours	Reference
Vibration Test	1. Amplitude: 0.75mm 2. Frequency: 5-500Hz 3. Number of sweep cycles per axis 10 4. Direction: X. Y. Z	Duration: 2 hours each direction	IEC-68-2-6
Drop Test	1. Height: 1m 2. Concrete platform	6 Times	IEC-68-2-32
Thermal Shock Test	1. Low temperature: -40℃ 2. High temperature: + 85℃ 3. Soak time: 30 minutes 4. Transition time: less than 20 minutes	5 Cycles	IEC-68-2-14
Solderability Test	Dipped in 245±5 ℃ molten solder	Time: 3~5 seconds	IEC-68-2-20
High Temperature Test	1. Humidity: less than 50% RH 2. Temperature: 85±2 ℃	Duration: 96 hours	IEC-68-2-2
Low Temperature Test	Temperature: -40±3 ℃	Duration: 96 hours	IEC-68-2-1