


Part Number: AE-RJD701B003

2*4 Port RJ45 10/100/1000Base-T Network Connector

Page: 1/4

- RoHS compliant.
- Housing: Thermoplastic Black UL94V-0.
- Shielding: Brass.
- Shielding Plating: Nickel.
- Contact: Phosphor bronze. With 6μ" gold plating.
- Operating Temperature: 0°C TO +70°C.
- Dielectric Withstanding Voltage Between Shield And Terminal: 1500 VAC RMS 50Hz or 60Hz, 1MIN.

Mechanicals:

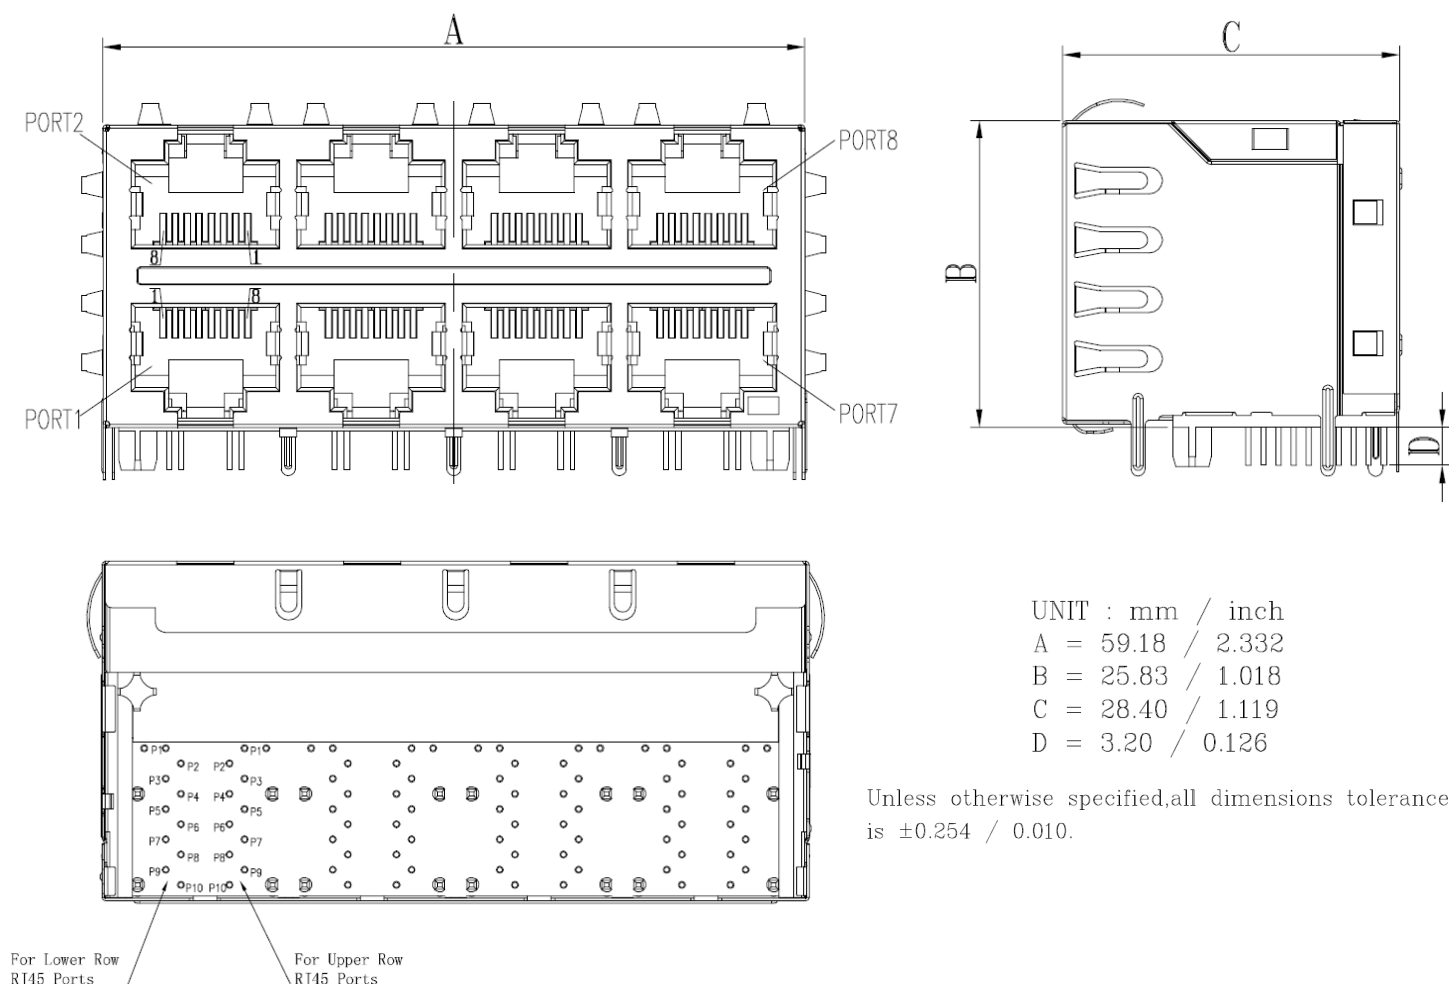

Address: Room 505 Block A, Xinian Centre, Shennan Road, Futian District, Shenzhen, Guangdong, P.R. China

Tel : +86 (755) 86538552 Fax : +86 (755) 26653184 Post Code : 518057


Http: www.appselectronics.com E-mail: sales@appselectronics.com

Part Number: AE-RJD701B003

2*4 Port RJ45 10/100/1000Base-T Network Connector

Page: 2/4

Schematic

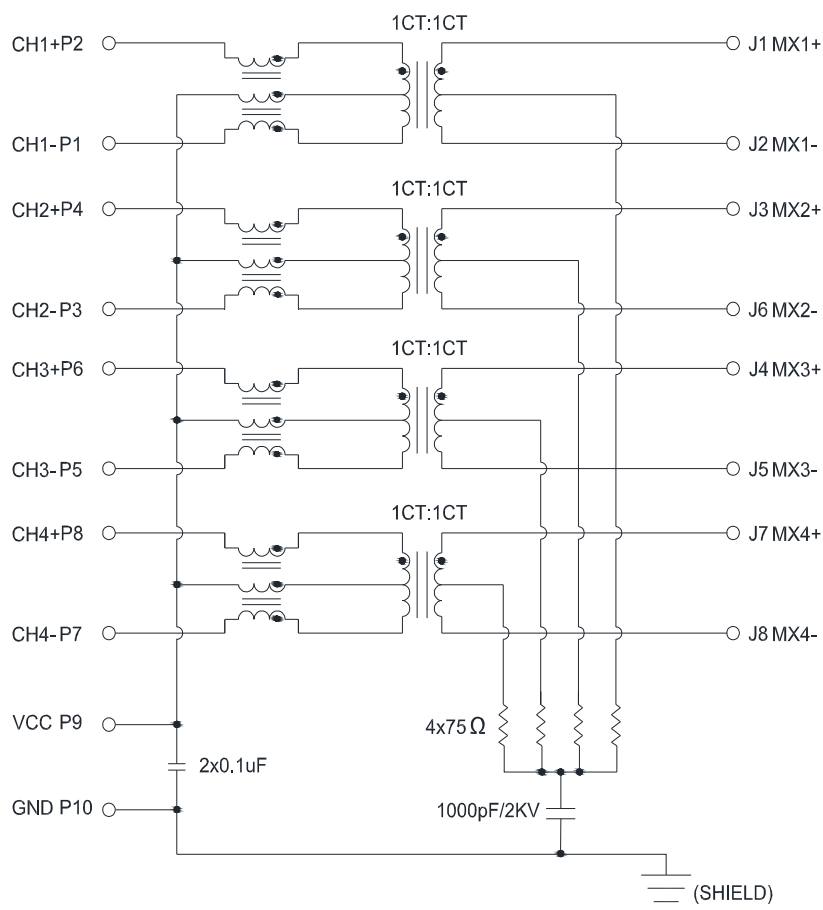

Electrical Characteristics:


- 1.TR:(100KHz,0.1V);
PINS:(P2-P1):(J1-J2)=1:1±5%
PINS:(P4-P3):(J3-J6)=1:1±5%
PINS:(P6-P5):(J4-J5)=1:1±5%
PINS:(P8-P7):(J7-J8)=1:1±5%
- 2.LX:(100KHz,100mV,8mA,DC Bias)
350uH MINIMUM
- 3.DCR:
1.2OHMS MAXIMUM
- 4.HI-POT:
2250VDC FOR 60 SECONDS
- 5.INSERTION LOSS:
-1.0dB MAXIMUM AT 1MHz TO 100MHz;
- 6.RETURN LOSS:
-18dB MINIMUM AT 1MHz TO 30MHz;
-13dB MINIMUM AT 30MHz TO 60MHz
-10dB MINIMUM AT 60MHz TO 80MHz
- 7.CROSS TALK:
-30dB MINIMUM AT 1MHz TO 100MHz
- 8.COMMON TO COMMON MODE REJECTION:
-30dB MINIMUM AT 1MHz TO 100MHz

Part Number: AE-RJD701B003

2*4 Port RJ45 10/100/1000Base-T Network Connector

Page: 3/4

Recommended PCB Layout:

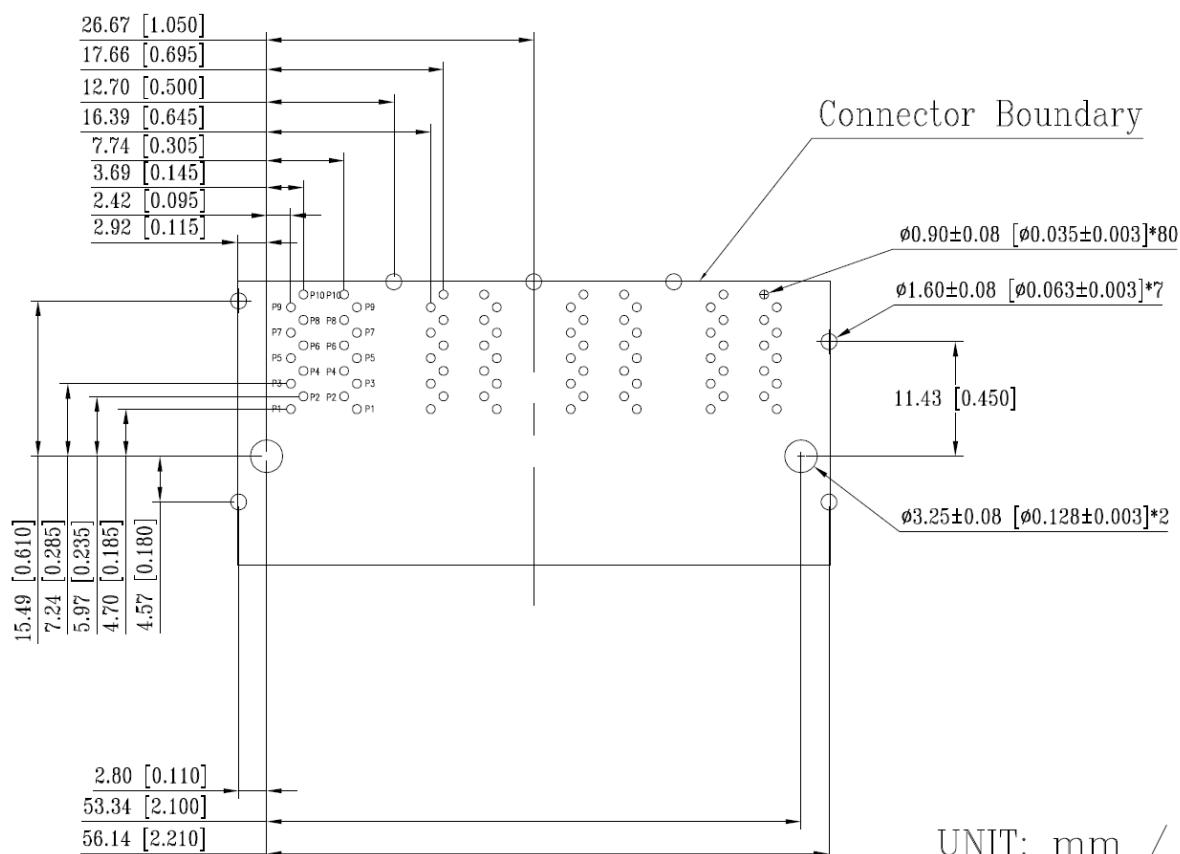

UNIT: mm / inch

Tolerances: ± 0.10 / 0.004

Part Number: AE-RJD701B003

2*4 Port RJ45 10/100/1000Base-T Network Connector

Page: 4/4

Reliability Test And Condition:

Test Item	Test Condition	Cycles or Hours	Reference
Vibration Test	1. Amplitude: 0.75mm 2. Frequency: 5-500Hz 3. Number of sweep cycles per axis 10 4. Direction: X. Y. Z	Duration: 2 hours each direction	IEC-68-2-6
Drop Test	1. Height: 1m 2. Concrete platform	6 Times	IEC-68-2-32
Thermal Shock Test	1. Low temperature: -40℃ 2. High temperature: + 85℃ 3. Soak time: 30 minutes 4. Transition time: less than 20 minutes	5 Cycles	IEC-68-2-14
Solderability Test	Dipped in 245±5 ℃ molten solder	Time: 3~5 seconds	IEC-68-2-20
High Temperature Test	1. Humidity: less than 50% RH 2. Temperature: 85±2 ℃	Duration: 96 hours	IEC-68-2-2
Low Temperature Test	Temperature: -40±3 ℃	Duration: 96 hours	IEC-68-2-1