




Part Number: AE-RJU101B027F

1*1 Port RJ45 10/100/1000Base-T Network Connector

Page: 1/3

- RoHS compliant.
- Housing: PA66 Black UL94V-0.
- Shield: Brass.
- Shield Plating: Nickel.
- Contact: Phosphor bronze. With 6μ" gold plating.
- Operating Temperature: 0°C TO +70°C.

Mechanicals:

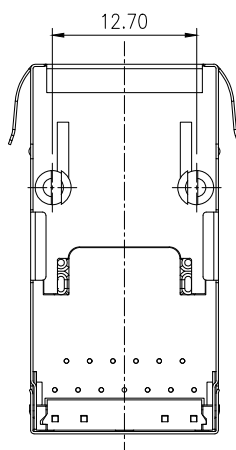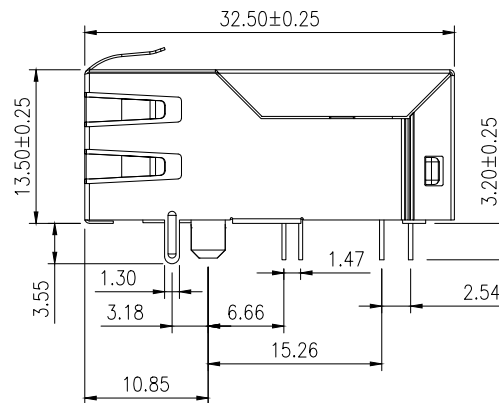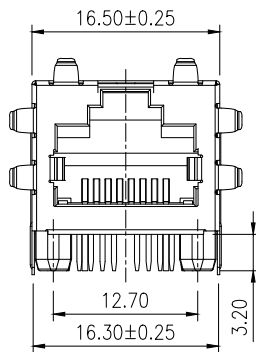


Unless otherwise specified, all dimensions tolerances is $\pm 0.254 / 0.010$.

Part Number: AE-RJU101B027F

1*1 Port RJ45 10/100/1000Base-T Network Connector

Page: 2/3


Schematic

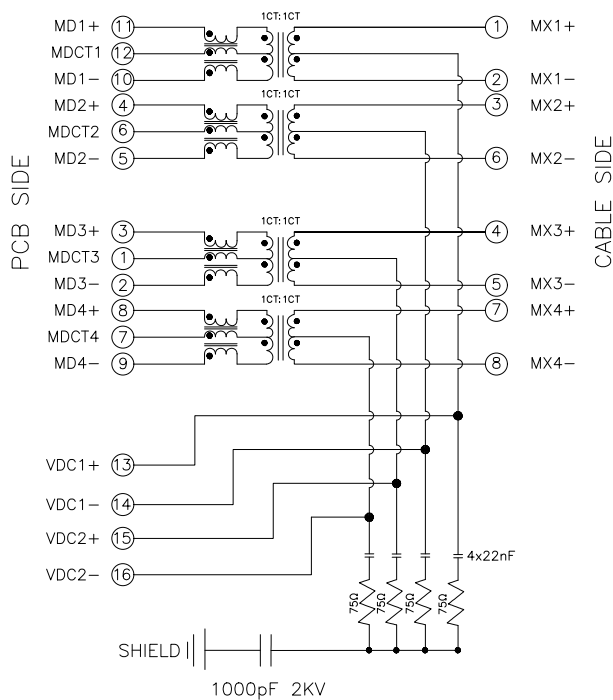

Electrical Characteristics:

1. TR: (100KHz, 0.1V);
PINS: (P11-P10): (J1-J2) = 1:1±5%
PINS: (P4-P5): (J3-J6) = 1:1±5%
PINS: (P3-P2): (J4-J5) = 1:1±5%
PINS: (P8-P9): (J7-J8) = 1:1±5%
2. LX: (100KHz, 100mV, 8mA, DC Bias)
350uH MINIMUM
3. DCR:
1.2OHMS MAXIMUM
4. HI-POT:
2250VDC FOR 60 SECONDS
5. INSERTION LOSS:
-1.0dB MAXIMUM AT 1MHz TO 100MHz;
6. RETURN LOSS:
-18dB MINIMUM AT 1MHz TO 30MHz;
-13dB MINIMUM AT 30MHz TO 60MHz
-10dB MINIMUM AT 60MHz TO 80MHz
7. CROSS TALK:
-30dB MINIMUM AT 1MHz TO 100MHz
8. COMMON TO COMMON MODE REJECTION:
-30dB MINIMUM AT 1MHz TO 100MHz
9. COMPLIANT WITH IEEE802.3af:
350mA MAX @57VDC CONTINUOUS

Recommended PCB Layout:

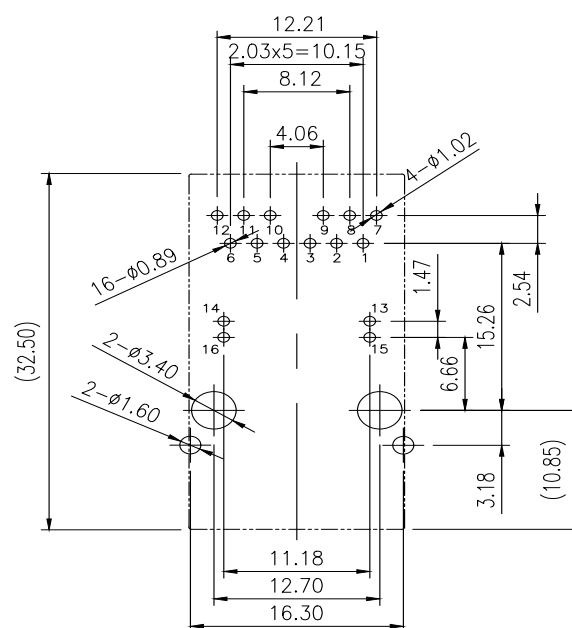

Suggested PCB Layout
All dim. tolerance are $\pm 0.05\text{mm}$.

Part Number: AE-RJU101B027F

1*1 Port RJ45 10/100/1000Base-T Network Connector

Page: 3/3

Reliability Test And Condition:

Test Item	Test Condition	Cycles or Hours	Reference
Vibration Test	1. Amplitude: 0.75mm 2. Frequency: 5-500Hz 3. Number of sweep cycles per axis 10 4. Direction: X. Y. Z	Duration: 2 hours each direction	IEC-68-2-6
Drop Test	1. Height: 1m 2. Concrete platform	6 Times	IEC-68-2-32
Thermal Shock Test	1. Low temperature: -40℃ 2. High temperature: +85℃ 3. Soak time: 30 minutes 4. Transition time: less than 20 minutes	5 Cycles	IEC-68-2-14
Solderability Test	Dipped in 245±5 ℃ molten solder	Time: 3~5 seconds	IEC-68-2-20
High Temperature Test	1. Humidity: less than 50% RH 2. Temperature: 85±2 ℃	Duration: 96 hours	IEC-68-2-2
Low Temperature Test	Temperature: -40±3 ℃	Duration: 96 hours	IEC-68-2-1