


1) PHYSICAL DIMENSION & SCHEMATIC CIRCUIT :

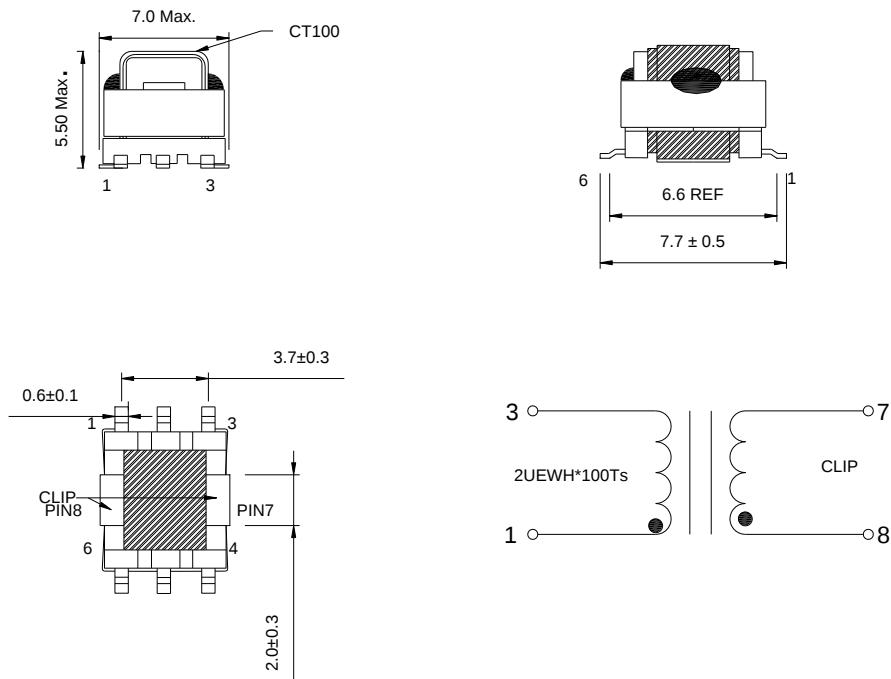

2) ELECTRICAL SPECIFICATION :

Part number	Turn Ratio Pri:sec	Current Rating (A)	Secondary Inductance (mH MIN)	DCR(mΩ MAX)		Highpot (Vrms)
				Primart (8-7)	Secondary (1-3)	
AE-SEE05010	1:100	8	2.0	6	5500	500

3 . MATERIAL LIST:

NO.	Item	Material Description	Temp. (Flame) Class	Vender	UL File No.
1.	CORE	FERRITES,EE5.0	-	ACME or EQUIV	-
2.	BOBBIN	LCP E4008	V-0	SUMITOMO CHEMICAL CO.,LTD.	E54705
3.	WIRE	POLYURETHANE TYFU-H180	180°C	TA YA ELECTRIC WIRE & CABLE CO.,LTD	E84201
4	TAPE	LY-20X	180°C	CHANG SHU LIANG YI TAPE INDUSTRY CO LTD	E246820
5	SOLDER	PF604	-	SHENMAO TECHNOLOGY INC	-
6	VARNISH	V1630FS	130°C	VIKING PRODUCTS	E314793